ROSE PARK ELEMENTARY SCHOOL SIGNAGE

GSBS ARCHITECTS

375 WEST 200 SOUTH
SALT LAKE CITY, UT 84101

P 801.521.8600

www.gsbsarchitects.com



ROSE PARK
ELEMENTARY
SCHOOL SIGNAGE

1105 WEST 1000 NORTH
SALT LAKE CITY, UT 84116

SALT LAKE CITY SCHOOL DISTRICT

995 WEST BEARDSLEY PLACE
SALT LAKE CITY, UTAH 84119

GSBS PROJECT NO.:	2026.019.00
ISSUED DATE:	07/31/2026

VICINITY MAP



SITE LOCATION:
1105 W 1000 N,
SALT LAKE CITY, UT 84116

DRAWING INDEX

DRAWING INDEX	
SHEET NUMBER	SHEET NAME
GENERAL	
GI000	COVER SHEET
GI001	DRAWING INDEX, SYMBOLS AND ABBREVIATIONS
2	
ARCHITECTURAL	
AE951	SIGNAGE PLAN
AE952	ROOM SIGNAGE SCHEDULE
AE953	SIGNAGE DETAILS
5	

GSBS ARCHITECTS

375 WEST 200 SOUTH
SALT LAKE CITY, UT 84101

P 801.521.8600

www.gsbsarchitects.com

REVISIONS:

ABBREVIATIONS

ABV	ABOVE	DTL	DETAIL	GALV	GALVANIZED	OC	ON CENTER	SHT	SHEET
AFF	ABOVE FINISH FLOOR	DIA	DIAMETER	GA	GAUGE	OPP	OPPOSITE	SIM	SIMILAR
ADJ	ADJUSTABLE	DIM	DIMENSION	GC	GENERAL CONTRACTOR	OD	OUTSIDE DIAMETER	STC	SOUND TRANSMISSION CLASS
ALUM	ALUMINUM	DW	DISHWASHER	GL	GLASS / GLAZING	OH	OVERHEAD	SPEC	SPECIFICATION
ASTM	AMERICAN SOCIETY FOR TESTING MATERIALS	DBL	DOUBLE	GLB	GLUE LAMINATED BEAM	OH DR	OVERHEAD DOOR	SS	STAINLESS STEEL
AB	ANCHOR BOLT	DN	DOWN	GND	GROUND	OFCI	OWNER FURNISHED CONTRACTOR INSTALLED	STD	STANDARD
ANOD	ANODIZED	DRWR	DRAWER	GYP BD	GYPSUM BOARD	OFOI	OWNER FURNISHED OWNER INSTALLED	STL	STEEL
APPROX	APPROXIMATE	DWGS	DRAWINGS	HW	HARDWARE	PNT	PAINTED OR PAINT	STRU	STRUCTURAL
ARCH	ARCHITECTURAL OR ARCHITECT	EA	EACH	HVAC	HEATING / VENTILATION / AIR CONDITIONING	PTN	PARTITION	SUSP	SUSPENDED
AHJ	AUTHORITY HAVING JURISDICTION (BUILDING DEPARTMENT)	ELEC	ELECTRICAL	H	HEIGHT	PVMT	PAVEMENT	SYS	SYSTEM
		EL	ELEVATION	HM	HOLLOW METAL	PERP	PERPENDICULAR	THRU	THROUGH
BP	BASE PLATE	ELEV	ELEVATOR	HORIZ	HORIZONTAL	PLAM	PLASTIC LAMINATE	T.O.	TOP OF
BSMT	BASEMENT	EQ	EQUAL	HR	HOUR	PL	PLATE	TOA	TOP OF ASPHALT
BRG	BEARING	EPDM	ETHYLENE PROPYLENE DIENE M-CLASS (ROOFING)	HYD	HYDRANT	PLUM	PLUMBING	TOC	TOP OF CURB
BTWN	BETWEEN			IN.	INCHES OR INCH	PVC	POLYVINYL CHLORIDE	TOF	TOP OF FOOTING
BITUM	BITUMINOUS	EXIST	EXISTING	INFO	INFORMATION	PCF	POUNDS PER CUBIC FOOT	TOS	TOP OF SLAB OR SIDEWALK
BLKG	BLOCKING	EXP	EXPANSION	INSUL	INSULATION	PLF	POUNDS PER LINEAL FOOT	TOW	TOP OF WALL
BD	BOARD	EJ	EXPANSION JOINT	INT	INTERIOR	PSF	POUNDS PER SQUARE FOOT	TYP	TYPICAL
BO	BOTTOM OF	EXT	EXTERIOR	JNT	JOINT	PSI	POUNDS PER SQUARE INCH	UNO	UNLESS NOTED OTHERWISE
BLDG	BUILDING	FT	FEET / FOOT	LAV	LAVATORY	PT	PRESSURE TREATED	VEN	VENEER
CLG	CEILING	FV	FIELD VERIFY	LT WT	LIGHT WEIGHT	QTY	QUANTITY	FV	VERIFY IN FIELD
CL	CENTER LINE	FIN	FINISH	MAINT	MAINTENANCE	RAD	RADIUS	VERT	VERTICAL
CLR	CLEAR	FF	FINISH FLOOR	MFR	MANUFACTURER	RE	REFER / REFERENCE	VEST	VESTIBULE
COL	COLUMN	FA	FIRE ALARM	MO	MASONRY OPENING	RCP	REFLECTED CEILING PLAN	WC	WATER CLOSET
CONC	CONCRETE	FE	FIRE EXTINGUISHER	MAT	MATERIAL	REF	REFRIGERATOR	WRB	WEATHER RESISTIVE BARRIER
CMU	CONCRETE MASONRY UNIT	FEC	FIRE EXTINGUISHER CABINET	MAX	MAXIMUM	REINF	REINFORCED	W	WIDTH
CONST	CONSTRUCTION	FLR	FLOOR	MECH	MECHANICAL	REQ	REQUIRED	W/	WITH
CONT	CONTINUOUS	FD	FLOOR DRAIN	MTL	METAL	REV	REVISION	W/O	WITHOUT
CFOI	CONTRACTOR FURNISHED OWNER INSTALLED	FTG	FOOTING	MIN	MINIMUM	RD	ROOF DRAIN	WD	WOOD
CJ	CONTROL JOINT	FDN	FOUNDATION	MISC	MISCELLANEOUS	RM	ROOM		
COORD	COORDINATE	GAL	GALLON	NIC	NOT IN CONTRACT	RO	ROUGH OPENING		
DEMO	DEMOLISH / DEMOLITION	GPH	GALLONS PER HOUR	NTS	NOT TO SCALE	SCHED	SCHEDULE		
DEPT	DEPARTMENT	GPM	GALLONS PER MINUTE	NO.	NUMBER	SECT	SECTION		

NOTE:
ABBREVIATIONS FOR FINISHED MATERIALS ARE DESCRIBED IN THE FINISH LEGEND.

GRAPHIC SYMBOLS

GRID — GRID LINES

/ SHEET — DETAIL SYMBOL
DETAIL NUMBER/
SHEET WHERE DETAIL IS DRAWN

/ SHEET — BUILDING SECTION SYMBOL
SECTION REFERENCE/
SHEET WHERE SECTION IS DRAWN

/ SHEET — WALL SECTION SYMBOL
SECTION REFERENCE/
SHEET WHERE SECTION IS DRAWN

SHEET / # — EXTERIOR ELEVATION SYMBOL
ELEVATION IDENTIFICATION
SHEET WHERE ELEVATION IS DRAWN

SHEET / # — INTERIOR ELEVATION SYMBOL
ELEVATION IDENTIFICATION
SHEET WHERE ELEVATION IS DRAWN

ELEVATION CONTROL POINT
OR DATUM POINT

100A — DOOR TAG
DOOR NUMBER

W1 — WINDOW TAG
WINDOW OR STOREFRONT NUMBER

NAME / 101 — ROOM TAG
ROOM NAME
ROOM NUMBER

1 — REVISION TAG

/ SHEET VIEW NAME / SCALE — VIEW TITLE
VIEW NUMBER/
SHEET WHERE VIEW IS LOCATED
VIEW NAME/ VIEW SCALE

MATERIALS/LEGEND

- CONCRETE MASONRY UNIT
- FACE BRICK
- CONCRETE (POURED IN PLACE)
- GYPSUM BOARD OR SETTING BEDS
- INSULATION (BATT & BLANKET)
- INSULATION (RIGID/SEMI-RIGID)
- PLYWOOD
- CONTINUOUS ROUGH WOOD
- BLOCKING, ROUGH WOOD
- METAL (LARGE SCALE)
- GRAVEL
- EARTH
- COMPACTED FILL
- QUARRY/CERAMIC TILE
- FIREPROOFING
- WOOD

AHJ Stamp

ROSE PARK ELEMENTARY SCHOOL SIGNAGE

1105 WEST 1000 NORTH
SALT LAKE CITY, UT 84116

SALT LAKE CITY SCHOOL DISTRICT

995 WEST BEARDSLEY PLACE
SALT LAKE CITY, UTAH 84119

OWNER PROJECT NO.:	8525
GSBS PROJECT NO.:	2026.019.00
ISSUED DATE:	07/31/2026

DRAWING INDEX, SYMBOLS AND ABBREVIATIONS

GI001 REV


SIGNAGE LEGEND

LEGEND:


S-##	S-## REFERS TO SIGNAGE TYPE.
	SEE SIGNAGE DETAILS.
S-E2	EXIT STAIRS SIGN
S-E3	ELEVATOR SIGN
S-E4	IN CASE OF FIRE EGRESS SIGN
S-E6	LEVEL SIGN
S-E7	EXIT SIGN
S-F1	MAXIMUM OCCUPANCY SIGN
S-F2	FIRE RISER SIGN
S-F3	FIRE RISER INTERIOR SIGN
S-R1	TYPICAL ROOM SIGN
S-R2	ROOM NAME | ROOM NUMBER
S-R3	ROOM NAME | ROOM NUMBER | REMOVABLE INSERT
S-R4	TYPICAL EXTERIOR ROOM SIGN
S-R5	ROOM NAME | ROOM NUMBER | REMOVABLE INSERT
S-T1	GIRLS RESTROOM SIGN
S-T2	BOYS RESTROOM SIGN
S-T3	ADULT RESTROOM SIGN
S-T4	FAMILY RESTROOM SIGN

GENERAL NOTES:

1. REMOVE ALL EXISTING WALL-MOUNTED, ROOM SIGNS UNLESS NOTED OTHERWISE ON SIGNAGE PLAN. FIELD VERIFY LOCATIONS & QUANTITIES DURING BIDDING PERIOD. REMOVE WITH CARE TO MINIMIZE DAMAGE TO EXISTING WALL SURFACES.
2. EXISTING SIGNS ARE MOUNTED ON BOTH FRAMED WALLS AND MASONRY WALLS. WALL FINISHES VARY FROM PAINTED GYPSUM BOARD, TO EXPOSED MASONRY, TO TILE, TO FRP. FIELD VERIFY WALL MATERIALS DURING BIDDING PERIOD.
3. REMOVE ALL EXISTING SIGN FASTENERS & ADHESIVE RESIDUE. PATCH & REPAIR EXISTING WALL SURFACES SMOOTH. AT PAINTED WALLS, REPAINT PATCHED AREA TO MATCH EXISTING COLOR AND SHEEN. PREPARE MOCK-UP OF ONE CONDITION FOR REVIEW BY OWNER'S REPRESENTATIVE PRIOR TO PROCEEDING WITH ALL LOCATIONS. SEE PAINT SCHEDULE ON SHEET AE592.
4. SEE SHEET AE953 FOR SIGNAGE DETAILS.
5. SEE TYPICAL MOUNTING HEIGHTS DETAIL FOR INSTALL HEIGHT.
6. IF SIGN LOCATION OCCURS AT A WINDOW OR SIDELIGHT, MOUNT ON GLASS AND PROVIDE SAME SIZE BACK-UP PANEL ON OPPOSITE SIDE OF GLASS.
7. PROVIDE TAMPER RESISTANT SCREWS ON THE SIGN FRAMES
8. SIGNS ARE TO BE MOUNTED MECHANICALLY WITH SCREWS AND ANCHORS (NO DOUBLE STICK TAPE, EXCEPT FOR WINDOWS).

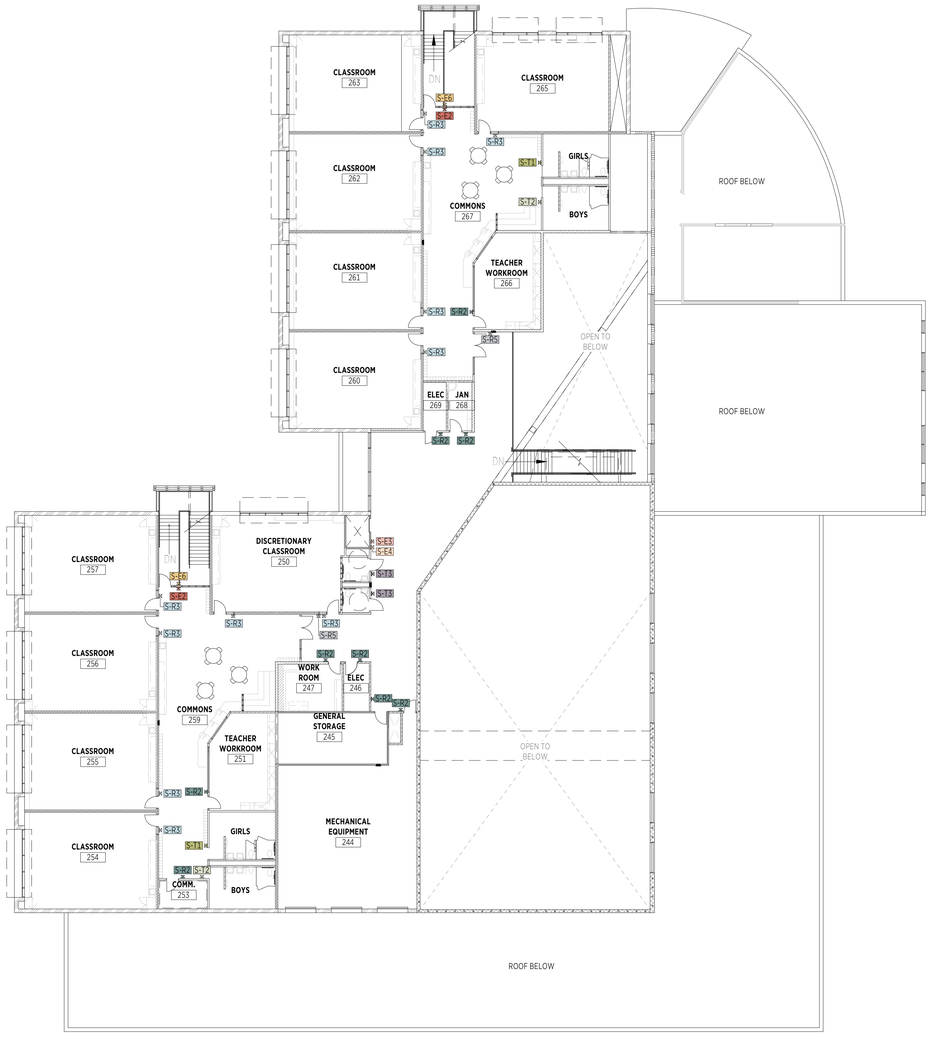

2 AE951 SIGNAGE PLAN - LEVEL TWO
1/16" = 1'-0"

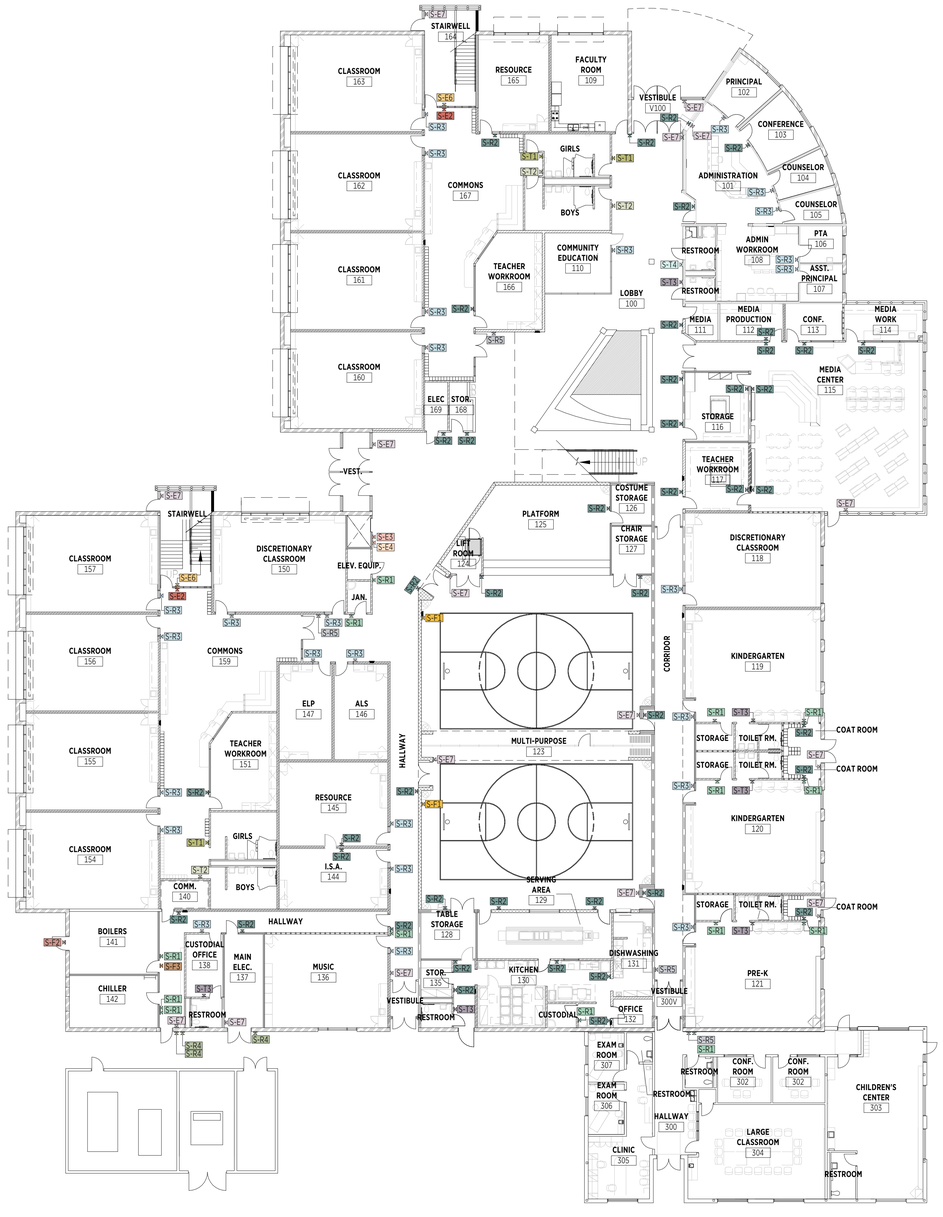

1 AE951 SIGNAGE PLAN - LEVEL ONE
1/16" = 1'-0"

GSBS ARCHITECTS
375 WEST 200 SOUTH
SALT LAKE CITY, UT 84101
P 801.521.8600
www.gsbsarchitects.com

RESERVED FOR CONSULTANT LOGO

STATE OF UTAH
VALERIE W. NAGASAWA
261112-0301
LICENSED ARCHITECT

REVISIONS:

NOTE - THIS SHEET IS INTENDED TO BE VIEWED IN COLOR

ROSE PARK ELEMENTARY SCHOOL SIGNAGE

1105 WEST 1000 NORTH
SALT LAKE CITY, UT 84116

SALT LAKE CITY SCHOOL DISTRICT

995 WEST BEARDSLEY PLACE
SALT LAKE CITY, UTAH 84119

OWNER PROJECT NO.:	8525
GSBS PROJECT NO.:	2026.019.00
ISSUED DATE:	07/31/2026

SIGNAGE PLAN

AE951 REV

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-E2	LEVEL 1	N/A	N/A	GLASS	
	S-E2	LEVEL 1	N/A	N/A	GLASS	
	S-E2	LEVEL 2	N/A	N/A	GLASS	
	S-E2	LEVEL 2	N/A	N/A	GLASS	

4

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-E3	LEVEL 1	N/A	N/A		
	S-E3	LEVEL 2	N/A	N/A		

2

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-E4	LEVEL 1	N/A	N/A		
	S-E4	LEVEL 2	N/A	N/A		

2

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-E6	LEVEL 1	N/A	N/A	GLASS	
	S-E6	LEVEL 1	N/A	N/A	GLASS	
	S-E6	LEVEL 2	N/A	N/A	GLASS	
	S-E6	LEVEL 2	N/A	N/A	GLASS	

4

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		
	S-E7	LEVEL 1	N/A	N/A		

16

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-F1	LEVEL 1	N/A	N/A		
	S-F1	LEVEL 1	N/A	N/A		

2

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-F2	LEVEL 1	N/A	N/A		

1

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-F3			BOILER ROOM		

1

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-R1			ROOF ACCESS		
	S-R1	LEVEL 1		BOILER ROOM		
	S-R1	LEVEL 1		CHILLER ROOM		
	S-R1	LEVEL 1		COAT ROOM		
	S-R1	LEVEL 1		STORAGE		
	S-R1	LEVEL 1		STORAGE		
	S-R1	LEVEL 1		STORAGE		
	S-R1	LEVEL 1		COAT ROOM		
	S-R1	LEVEL 1		COAT ROOM		
	S-R1	LEVEL 1		JANITOR		
	S-R1	LEVEL 1		ELEVATOR EQUIPMENT		
	S-R1	LEVEL 1		CUSTODIAL		
	S-R1	LEVEL 1		BUILDING FACILITIES		
	S-R1	LEVEL 1		SCHOOL STAFF ENTRY ONLY		GRADE 2 BRAILLE "SCHOOL STAFF ENTRY"

14

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-R2	LEVEL 1	101	ADMINISTRATION	GLASS	
	S-R2	LEVEL 1	101	ADMINISTRATION	DOOR	
	S-R2	LEVEL 1	103	CONFERENCE	GLASS	
	S-R2	LEVEL 1	109	FACULTY ROOM		
	S-R2	LEVEL 1	111	MEDIA		
	S-R2	LEVEL 1	112	MEDIA		
	S-R2	LEVEL 1	112	MEDIA CENTER		
	S-R2	LEVEL 1	113	CONFERENCE		
	S-R2	LEVEL 1	114	MEDIA OFFICE		
	S-R2	LEVEL 1	115	MEDIA CENTER		
	S-R2	LEVEL 1	115	MEDIA CENTER		
	S-R2	LEVEL 1	115	MEDIA CENTER		
	S-R2	LEVEL 1	116	STORAGE		
	S-R2	LEVEL 1	116	STORAGE		
	S-R2	LEVEL 1	117	WORK ROOM		
	S-R2	LEVEL 1	117	WORK ROOM		
	S-R2	LEVEL 1	119	CLASSROOM		
	S-R2	LEVEL 1	120	CLASSROOM		
	S-R2	LEVEL 1	121	CLASSROOM		
	S-R2	LEVEL 1	123	MULTI-PURPOSE ROOM		
	S-R2	LEVEL 1	123	MULTI-PURPOSE ROOM		
	S-R2	LEVEL 1	123	MULTI-PURPOSE ROOM		
	S-R2	LEVEL 1	123	MULTI-PURPOSE ROOM		
	S-R2	LEVEL 1	124	PLATFORM LIFT		
	S-R2	LEVEL 1	126	COSTUME STORAGE		
	S-R2	LEVEL 1	127	CHAIR STORAGE		
	S-R2	LEVEL 1	128	STORAGE		
	S-R2	LEVEL 1	128	STORAGE		
	S-R2	LEVEL 1	129	SERVING AREA		
	S-R2	LEVEL 1	129	SERVING AREA		
	S-R2	LEVEL 1	129	SERVING AREA		
	S-R2	LEVEL 1	131	DISHWASHING		
	S-R2	LEVEL 1	132	OFFICE		
	S-R2	LEVEL 1	135	STORAGE		
	S-R2	LEVEL 1	137	MAIN ELECTRICAL		
	S-R2	LEVEL 1	138	CUSTODIAL OFFICE		

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-R2	LEVEL 1	140	COMM. ROOM		
	S-R2	LEVEL 1	144	CLASSROOM		
	S-R2	LEVEL 1	145	CLASSROOM		
	S-R2	LEVEL 1	151	TEACHER WORK ROOM		
	S-R2	LEVEL 1	165	RESOURCE	GLASS	
	S-R2	LEVEL 1	166	TEACHER WORK ROOM		
	S-R2	LEVEL 1	168	STORAGE		
	S-R2	LEVEL 1	169	ELECTRICAL ROOM		
	S-R2	LEVEL 2	244	MECHANICAL EQUIPMENT		
	S-R2	LEVEL 2	246	GENERAL STORAGE		
	S-R2	LEVEL 2	246	ELECTRICAL		
	S-R2	LEVEL 2	247	WORK ROOM		
	S-R2	LEVEL 2	251	TEACHING STATION		
	S-R2	LEVEL 2	253	COMM.		
	S-R2	LEVEL 2	266	TEACHING STATION		
	S-R2	LEVEL 2	268	JANITOR		
	S-R2	LEVEL 2	269	ELECTRICAL		

53

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-R3	LEVEL 1	102	PRINCIPAL	GLASS	
	S-R3	LEVEL 1	104	COUNSELOR	GLASS	
	S-R3	LEVEL 1	105	COUNSELOR	GLASS	
	S-R3	LEVEL 1	106	PTA		
	S-R3	LEVEL 1	107	ASSISTANT PRINCIPAL		
	S-R3	LEVEL 1	110	COMMUNITY EDUCATION	GLASS	
	S-R3	LEVEL 1	118	DISCRETIONARY CLASSROOM	GLASS	
	S-R3	LEVEL 1	119	CLASSROOM		
	S-R3	LEVEL 1	120	CLASSROOM	GLASS	
	S-R3	LEVEL 1	121	CLASSROOM	GLASS	
	S-R3	LEVEL 1	136	MUSIC CLASSROOM		
	S-R3	LEVEL 1	138	CUSTODIAL OFFICE		
	S-R3	LEVEL 1	144	I.S.A.		
	S-R3	LEVEL 1	145	RESOURCE		
	S-R3	LEVEL 1	146	ALS		
	S-R3	LEVEL 1	147	ELP		
	S-R3	LEVEL 1	150	DISCRETIONARY CLASSROOM	GLASS	
	S-R3	LEVEL 1	150	DISCRETIONARY CLASSROOM	GLASS	
	S-R3	LEVEL 1	154	CLASSROOM	GLASS	
	S-R3	LEVEL 1	155	CLASSROOM	GLASS	
	S-R3	LEVEL 1	156	CLASSROOM	GLASS	
	S-R3	LEVEL 1	157	CLASSROOM		
	S-R3	LEVEL 1	160	CLASSROOM	GLASS	
	S-R3	LEVEL 1	161	CLASSROOM	GLASS	
	S-R3	LEVEL 1	162	CLASSROOM	GLASS	
	S-R3	LEVEL 1	163	CLASSROOM	GLASS	
	S-R3	LEVEL 2	250	DISCRETIONARY CLASSROOM	GLASS	
	S-R3	LEVEL 2	250	DISCRETIONARY CLASSROOM	GLASS	
	S-R3	LEVEL 2	254	CLASSROOM	GLASS	
	S-R3	LEVEL 2	255	CLASSROOM	GLASS	
	S-R3	LEVEL 2	256	CLASSROOM	GLASS	
	S-R3	LEVEL 2	257	CLASSROOM	GLASS	
	S-R3	LEVEL 2	260	CLASSROOM	GLASS	
	S-R3	LEVEL 2	261	CLASSROOM	GLASS	
	S-R3	LEVEL 2	262	CLASSROOM	GLASS	
	S-R3	LEVEL 2	263	CLASSROOM	GLASS	
	S-R3	LEVEL 2	265	CLASSROOM	GLASS	

57

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-R4			ROOF ACCESS		
	S-R4	LEVEL 1		BOILER		
	S-R4	LEVEL 1		MAIN ELECTRICAL		

3

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-RS	LEVEL 1		ROSE PARK ELEMENTARY		
	S-RS	LEVEL 1		LEARNING SUITE 160 -167		
	S-RS	LEVEL 1		ROSE PARK ELEMENTARY SCHOOL CLINIC		
	S-RS	LEVEL 1		LEARNING SUITE 150 - 159		
	S-RS	LEVEL 2		LEARNING SUITE 260 - 267		
	S-RS	LEVEL 2		LEARNING SUITE 250 - 259		

6

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-T1	LEVEL 1	N/A	SEE SHEET AE953	WALL	
	S-T1	LEVEL 1	N/A	SEE SHEET AE953		
	S-T1	LEVEL 1	N/A	SEE SHEET AE953	WALL	
	S-T1	LEVEL 2	N/A	SEE SHEET AE953	WALL	
	S-T1	LEVEL 2	N/A	SEE SHEET AE953	WALL	

5

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-T2	LEVEL 1	N/A	SEE SHEET AE953	WALL	
	S-T2	LEVEL 1	N/A	SEE SHEET AE953		
	S-T2	LEVEL 1	N/A	SEE SHEET AE953	WALL	
	S-T2	LEVEL 2	N/A	SEE SHEET AE953	WALL	
	S-T2	LEVEL 2	N/A	SEE SHEET AE953	WALL	

5

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-T3	LEVEL 1	N/A	SEE SHEET AE953		
	S-T3	LEVEL 1	N/A	SEE SHEET AE953		
	S-T3	LEVEL 1	N/A	SEE SHEET AE953		
	S-T3	LEVEL 1	N/A	SEE SHEET AE953		
	S-T3	LEVEL 1	N/A	SEE SHEET AE953	WALL	
	S-T3	LEVEL 1	N/A	SEE SHEET AE953		
	S-T3	LEVEL 2	N/A	SEE SHEET AE953	WALL	
	S-T3	LEVEL 2	N/A	SEE SHEET AE953	WALL	

8

SIGNAGE SCHEDULE

S-##	Type Mark	LEVEL	DOOR #/ ROOM #	ROOM NAME	MOUNTING	COMMENTS
	S-T4	LEVEL 1	N/A	SEE SHEET AE953	WALL	

1

EXISTING PAINT SCHEDULE

252	**ROSE PARK**	Interior Walls	ROSE PARK WALLS	Benjamin Moore	Ultra Spec 500 Interior	T545-1X	SATIN/PEARL	Y3 0X9.00, S1 0X1.50, 01 0X0.25	X				ROSE PARK WALLS
		Interior Walls	CLINIC HALL WALLS	Benjamin Moore	Ultra Spec 500 Interior	T545-1X	SATIN/PEARL	Y3 1X5.00, S1 0X0.75, O1 0X0.125					
		Bathrooms	ROSE PARK BATHROOMS	Benjamin Moore	Ultra Spec 500 Interior	N538-2X	EGGSHELL	S1 0X1.25, W1 4X17.00					
		Interior Walls	ROSE PARK BLUE GREEN OFFICE	Benjamin Moore	Ultra Spec 500 Interior	N538-2X	EGGSHELL	S1 3X20.00, Y2 1X3.00, G1 1X17.00	X				ROSE PARK BLUE GREEN OFFICE
		Interior Walls	ROSE PARK GOLD	Benjamin Moore	Ultra Spec 500 Interior	N538-2X	EGGSHELL	Y3 5X6.00, S1 0X5.00, R3 0X7.50	X				ROSE PARK GOLD
		Interior Walls	ROSE PARK RED	Benjamin Moore	Ultra Spec 500 Interior	0793-4X	?	S1 1X8.00, W1 4X20.00, M1 1X16.00, R3 3X20.00					ROSE PARK RED
		Interior Walls	ROSE PARK STAGE	Benjamin Moore	ADVANCE	0793-3x	SEMI-GLOSS	Y3 1X15.00, S1 0X22.00, W1 5X18.00, R3 1X2.00					
		Clinic Walls	CLINIC WALLS	Benjamin Moore	Ultra Spec 500 Interior	T545-1X	SATIN/PEARL	Y3 0X7.50, S1 0X5.50, Y1 2X0.00, R3 0X0.50	X				
		Int Doors/Frames	ROSE PARK CASINGS	Benjamin Moore	ADVANCE	0793-1X	SEMI-GLOSS	Y3 0X8.00, S1 0X2.00	X	X			
		Ext Doors/Frames	ROSE PARK DOORS	Benjamin Moore	ADVANCE	0794-4X	HIGH-GLOSS	S1 1X13.00, W1 3X0.00, M1 1X19.00, R3 4X15.00	X	X			

GSBS ARCHITECTS

375 WEST 200 SOUTH
SALT LAKE CITY, UT 84101

P 801.521.8600

www.gsbsarchitects.com

RESERVED FOR CONSULTANT LOGO

STATE OF UTAH
VALERIE
W. NAGASAWA
261112-0301
LICENSED ARCHITECT

REVISIONS:

ROSE PARK ELEMENTARY SCHOOL SIGNAGE

1105 WEST 1000 NORTH
SALT LAKE CITY, UT 84116

SALT LAKE CITY SCHOOL DISTRICT

995 WEST BEARDSLEY PLACE
SALT LAKE CITY, UTAH 84119


OWNER PROJECT NO.: 8525
GSBS PROJECT NO.: 2026.019.00
ISSUED DATE: 07/31/2026

ROOM SIGNAGE SCHEDULE


AE952 REV

SIGNAGE INSTALLATION STANDARDS


Standard Sign Location




When Mounting Space Is Not Available



At Doors Opening Outward into the Path of Travel



the Door Itself (ST9 - FIRE RISER SIGN)




BRAILLE FABRICATION STANDARDS

Domed or Rounded Braille Dots




USE OF GRADE 2 BRAILLE TRANSLATION


At Double Doors




SIGNAGE LEGEND




SIGN TYPE **S-T4**
FAMILY RESTROOM SIGN




SIGN TYPE **S-T3**
ADULT RESTROOM SIGN



SIGN TYPE **S-T2**
BOYS RESTROOM SIGN




SIGN TYPE **S-T1**
GIRLS RESTROOM SIGN



DESIGN MUST COMPLY WITH IBC SECTION 902.1.2


SIGN TYPE **S-F3**
FIRE RISER SIGN




NOTE:
LETTERING MUST BE RED ON A WHITE REFLECTIVE BACKGROUND

DESIGN MUST COMPLY WITH IBC SECTION 902.1.2


SIGN TYPE **S-F2**
FIRE RISER SIGN




SIGN TYPE **S-F1**
MAXIMUM OCCUPANCY SIGN




SIGN TYPE **S-E7**
EXIT SIGN




SIGN TYPE **S-E6**
LEVEL SIGN

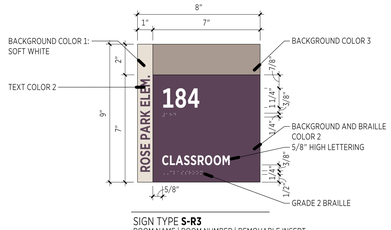


SIGN TYPE **S-R3**
ROOM NAME | ROOM NUMBER | REMOVABLE INSERT




SIGN TYPE **S-E4**
IN CASE OF FIRE EGRESS SIGN

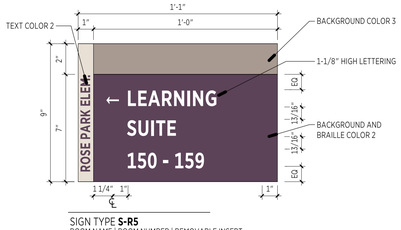


SIGN TYPE **S-R5**
ROOM NAME | ROOM NUMBER | REMOVABLE INSERT




SIGN TYPE **S-R2**
ROOM NAME | ROOM NUMBER




SIGN TYPE **S-E3**
ELEVATOR SIGN



SIGN TYPE **S-R4**
TYPICAL EXTERIOR ROOM SIGN



SIGN TYPE **S-R1**
TYPICAL ROOM SIGN



SIGN TYPE **S-E2**
EXIT STAIRS SIGN

TYPICAL SIGNAGE NOTES

1. BASIS-OF-DESIGN SIGN PRODUCT: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE 2/90 SIGN SYSTEMS; SLIDE MODULAR SIGN SYSTEM OR COMPARABLE PRODUCT APPROVED BY OWNER DURING BIDDING PERIOD.

2. SIGNS TO BE ALUMINUM, 9/32-INCH THICK WITH SLIM LINE END CAPS AND SQUARE CORNERS. FINAL COLOR SUBJECT TO OWNER APPROVAL PRIOR TO FABRICATION.
   BASIS OF DESIGN COLOR
   BACKGROUND COLOR 1: SOFT WHITE
   BACKGROUND AND BRAILLE COLOR 2: PURPLE / SW 6559
   BACKGROUND AND BRAILLE COLOR 3: TAUPE GREY

3. FONT: TRADE GOTHIC BOLD NO. 2.
   FINAL COLOR SUBJECT TO OWNER APPROVAL PRIOR TO FABRICATION.
   TEXT AND PICTOGRAM COLOR 1: MANUFACTURER'S STANDARD WHITE
   TEXT AND PICTOGRAM COLOR 2: BASIS OF DESIGN COLOR, PURPLE / SW 6559.

4. TRANSLATE TO GRADE 2 BRAILLE.

5. APPLIED LETTERS AND BEADED BRAILLE NOT ACCEPTABLE.

6. ALL SIGNS MUST COMPLY WITH ICC A117.1 SECTION 703.

7. SUBMIT PRODUCT INFORMATION AND SHOP DRAWINGS TO OWNER FOR REVIEW AND APPROVAL PRIOR TO ORDER, INCLUDING; FABRICATION AND INSTALLATION DETAILS AND ATTACHMENTS TO OTHER WORK, SIGN MOUNTING HEIGHTS, MESSAGE LIST, TYPE STYLES, GRAPHIC ELEMENTS (INCLUDING RAISED CHARACTERS AND BRAILLE) AND LAYOUT FOR EACH SIGN AT LEAST HALF SIZE.

8. SUBMIT FULL-SIZE SAMPLE OF PANEL SIGN AND VARIABLE COMPONENTS.

10. MAINTENANCE MATERIALS: FURNISH EXTRA MATERIALS FROM THE SAME PRODUCT RUN, THAT MATCH PROPERTIES INSTALLED AND THAT ARE PACKAGED WITH PROTECTIVE COVERING FOR STORAGE AND IDENTIFIED WITH LABELS DESCRIBING CONTENTS. VARIABLE COMPONENT MATERIALS: 12 REPLACEABLE TEXT INSERTS AND INTERCHANGEABLE CHARACTERS (LETTERS, NUMBERS, AND GRAPHIC ELEMENTS) OF EACH TYPE. TOOLS: ONE SET(S) OF SPECIALTY TOOLS FOR ASSEMBLING SIGNS AND REPLACING VARIABLE SIGN COMPONENTS.

ADDITIONAL SIGNAGE REQUIREMENTS:

RAISED CHARACTERS

CASE	- UPPER CASE CHARACTERS ONLY
DEPTH	- RAISED 1/32" MINIMUM ABOVE SIGN SURFACE
CHARACTER SPACING MAXIMUM	- 1/8" MINIMUM TO 4X STROKE WIDTH
LINE SPACING	- BASELINE TO BASELINE: 135% TO 170% OF "I" HEIGHT WITHIN A MESSAGE
CLEARANCE	- SEPARATED 3/8" MINIMUM FROM BRAILLE, RAISED BORDERS, AND DECORATIVE ELEMENTS.

BRAILLE

MULTI-LINE MESSAGES	- IF RAISED CHARACTER TEXT IS MULTI-LINED, BRAILLE IS PLACED ALL TOGETHER
CLEARANCE	- SEPARATED 3/8" MINIMUM FROM RAISED CHARACTERS, RAISED BORDERS, OR DECORATIVE ELEMENTS
SHAPE	- BRAILLE DOTS MUST ALWAYS BE DOMED OR ROUNDED, NEVER FLAT OR POINTED

GSBS ARCHITECTS
375 WEST 200 SOUTH
SALT LAKE CITY, UT 84101
P 801.521.8600
www.gsbsarchitects.com

RESERVED FOR CONSULTANT LOGO



REVISIONS:

ROSE PARK ELEMENTARY SCHOOL SIGNAGE

1105 WEST 1000 NORTH
SALT LAKE CITY, UT 84116

SALT LAKE CITY SCHOOL DISTRICT

995 WEST BEARDSLEY PLACE
SALT LAKE CITY, UTAH 84119

OWNER PROJECT NO.:	8525
GSBS PROJECT NO.:	2026.019.00
ISSUED DATE:	07/31/2026

SIGNAGE DETAILS

AE953 REV